

DETAILS

- 3G + 4G + 4GX CAT-6 Modem Router
- Download Speeds of up to 300 Mbps using MIMO technology
- OpenWrt Fully Featured Linux OS
- OpenVPN Server and Client
- Band B28 700 MHz (Telstra 4GX and Optus 4G Plus)
- Ability to select and lock in frequency band
- Automatic failover between ADSL/NBN and 4G LTE
- Supports Modbus TCP and Modbus RTU networks
- Supports 4G Voice VoLTE and E000 Call
- DIO control via SMS
- Fully operational on telstra.corp APN

LTE CAT-6 WiFi Router with SIM Card Slot (CM685V-6)

The Comset CM685V-6 is a CAT-6 industrial grade 3G/4G/4GX LTE WiFi Modem Router built on the OpenWrt Linux operating system. With download speeds of up to 300 Mbps and upload speeds of up to 50 Mbps, it is one of the few routers on the Australian market that support band B28 (700MHz).

SECURE CONNECTIVITY

The Comset CM685V-6 is designed to suit Australian conditions. It supports the latest LTE Advanced technology that performs fast and reliable data communication. It enables users to quickly create a secure and fast wireless network. It features a built-in WiFi N300 with speeds of up to 300 Mbps, one Ethernet WAN port for fixed internet connection and one Ethernet LAN port. It also includes a GPIO with four digital output ports to control electrical devices via SMS such as turning on a pump or opening a gate. The four DIO ports can also be used as digital input ports that can send an email or an SMS when triggered for alarm notification.

Other features include VPN IPSEC, PPTP, L2TP and Open VPN to establish a secure connection over the 3G/4G network.




RUGGED DESIGN

The durable and rugged design makes the CM685V-6 the router of choice for Australia's harshest and most remote environments. The compact design, easy integration and rich built-in features make it suitable for a wide range of industrial M2M applications, including industrial automation, building automation, smart metering, security, surveillance, transportation, health, mining and environmental monitoring.

Features and Benefits

BASIC FEATURES

- Supports multi-band 4G, 4GX, DC-HSPA+, HSPA+, HSPA, UMTS, GSM, GPRS, EDGE
- Ability to select and lock in frequency band
- SMA Standard antennas (Four magnetic base antennas included)
- Optimised EMC design
- Always on-line: On-line detection and automatic redial
- Wide range power input (5-40VDC)
- Smart power management
- Reliable, flexible, easy to use
- User friendly set-up wizard for easy configuration and set-up
- Network traffic real-time graphs
- Network Diagnostic Tools (Ping, Traceroute and NSLookup)
- RS-232 interface transparent communication (DTU modem function)
- 1 x Ethernet LAN RJ45 port & 1 x Ethernet WAN/LAN RJ45 port
- WiFi 802.11b/g/n N30

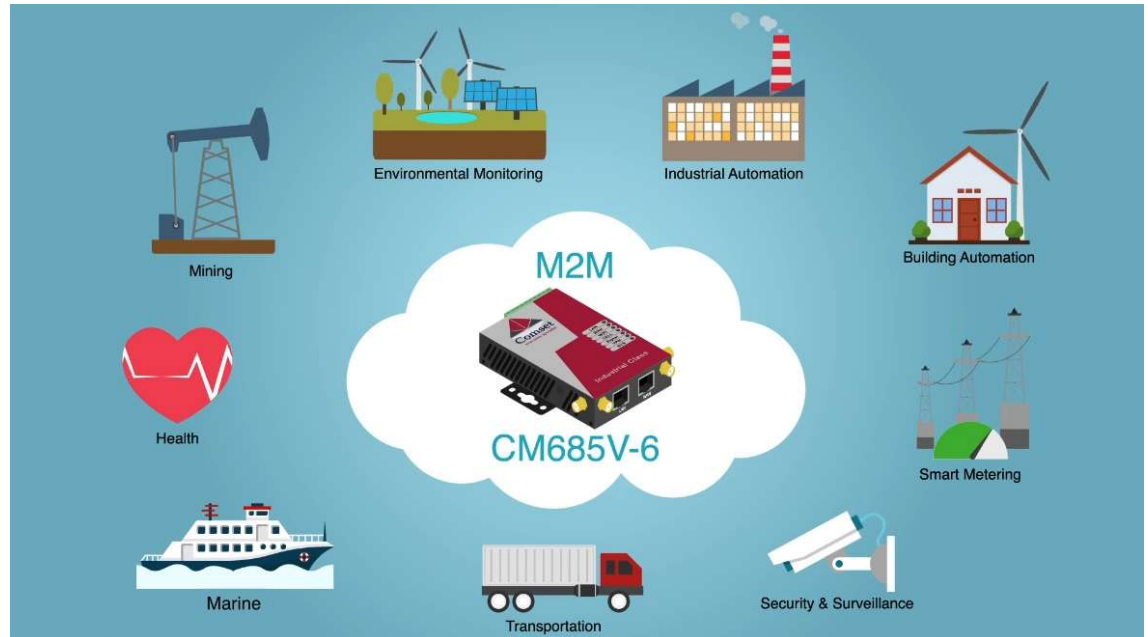

ENHANCED FEATURES

- Real-time clock
- VPN Server/Client (Open VPN, PPTP, L2TP, IPSec), and VPN pass-through
- Built-in DHCP server
- Supports DHCP Relay
- Supports NAT and DMZ host
- Supports DNS proxy and Dynamic DNS (DDNS)
- Supports Static routing table
- Supports packet filtering
- Built-in multi-routing backup (Ethernet and dialup network)
- System and network monitoring
- WAN interface traffic statistics
- Supports multiple protocol conversion
- Transparent data transmission (DTU feature)
- WEB/Telnet/console management interface
- Supports radio network data envelope counting
- Self-diagnostic and alarm output
- Local/remote profiles backup and retrieve
- Local/remote firmware upgrade via the web
- Remote web management
- Urgent event alarm via SMS
- Firewall, packet filtering
- Supports data center communication
- Supports NTP
- Supports LED status indication
- Supports VLAN ID tagging
- Supports LCP, ICMP check

Specifications

WIRELESS

Compatible Mobile Networks

- 4G/4GX
- UMTS WCDMA (HSUPA/ HSDPA/ HSPA/ HSPA+/ DC-HSPA+)
- GSM EDGE
- GSM GPRS

Cellular Frequency

- 4G LTE FDD including B1 (2100), B3 (1800), B5 (850), B7 (2600), B8 (900), B20 (800), B28 (700), B32 (1500)
- 4G LTE TDD including B38 (2600), B40 (2300), B41 (2500)
- 2 x CA Carrier Aggregation
 - B1+B1/B5/B8/B20/B28 - B38+B38
 - B3+B3/B5/B7/B8/B20/B28 - B40+B40
 - B7+B5/B7/B8/B20/B28 - B41+B41
 - B20+B32
- WCDMA 850/ 900/ 1800/ 2100Mhz

Bandwidth

- 4G LTE FDD/ 4GX LTE-A
 - Downlink 300Mbps - Uplink 50Mbps
- 4G LTE TDD
 - Downlink 300Mbps - Uplink 50Mbps
- DC HSPA+
 - Downlink 21/42Mbps - Uplink 5.76Mbps
- HSPA
 - Downlink 14.4Mbps - Uplink 5.76Mbps
- HSUPA
 - Downlink 7.2Mbps - Uplink 5.76Mbps
- HSDPA
 - Downlink 7.2Mbps - Uplink 384 Kbps
- WCDMA/UMTS
 - Downlink 384 Kbps - Uplink 384 Kbps
- EDGE
 - Downlink 236 Kbps - Uplink 118 Kbps
- GPRS
 - Downlink 85.6 Kbps - Uplink 42.8 Kbps

WiFi

- 802.11b/g/n; 300Mbps

SMS

- SMS call to control router to be online, offline, reboot, status info, alarm, WiFi on, WiFi off

VLAN

- ID tagging supported

Fail Over Redundancy (network backup feature)

- Auto-dial feature, keep alive link
- Cellular (2G/3G/4G), RJ45 WAN (xDSL, DHCP, Fixed IP), WiFi client

DTU

- DTU feature, serial RS232 to Cellular Gateway

VPN

- OpenVPN, IPSec, L2TP, PPTP
- Server and Client supported

Firmware upgrade

- Supported locally and remotely

Protocol support

- TCP, UDP, SMTP, POP, ICMP, FTP, PPP, PPPoE, DHCP, DDNS, DNS, SNMP, WPS, DMZ, Syslog (local and remote), NAT, xDSL, NTP, QoS, SNMP, Dynamic routing (OSPF, OSPF6, RIP, RIPng, BGP)
- Support firmware update locally and remotely

Security

- Supports 64/128 bits WEP, 802.1x, WPA and WPA2
- Supports WDS
- TKIP, AES encryption
- Supports WPA1/2- 802.1x
- Supports EAP- TLS, TTLS, LEAP, PEAP
- Supports access with username and password
- Supports access control base WAN/LAN interface
- Supports access control base source IP address
- Defence DOS attack, supports SYN flooding, IP surfing, ping of death, fragile, teardrop, land
- Supports PAP and CHAP
- Supports IP filtering

Advanced Firewall Features

- Network Address Translation (NAT)
- Stateful Packet Inspection (SPI)
- VPN Pass-through

Media Access Control

- CSMA/CA with ACK

Certifications

- Radius Client

INTERFACES

LAN

- 1 x 10/100M LAN port (RJ45 interface)
- 1 x 10/100M LAN/WAN port (RJ45 interface)

Antennas

- 2 x antennas for WiFi (detachable SMA interface x 2)
- 2 x antennas for Cellular (detachable SMA interface x 2, cellular supports diversity receiving MIMO)

LED

- SYS*1 • CELL*1 • LAN*1
- VPN*1 • WAN*1 • WiFi*1
- SIGNAL*1

Serial port

- RS232 built-in terminal block interface

AT command

- Supported

UIM/SIM Card Slot

- Supports 1.8/3V UIM/SIM cards, one sim card slot

DC Jack

- Two types of power input
 - 2.5mm DC jack * 1
 - Terminal block * 1

POWER

Power supply

- DC5V-40V, typical DC9V 1A or 12V 1A
- 12V car use supported

Power consumption

- Current
 - Idle 122mA@12VDC
 - Max 208mA@12VDC
 - Average 167mA@12VDC
- Power
 - Idle 1.2W@12VDC
 - Max 2.5W@12VDC
 - Average 2W@12VDC

SOFTWARE

Device Management

- WEB interface (Internet Explorer v6 or later, Mozilla Firefox v1.5 or later, Chrome, Opera, Safari or other Java-enabled browsers)

Minimum System Requirements

- Mobile Internet Access Subscription and Internet PC Adapter
- Computer with:
 - Windows 7, 8, 10, - Internet Explorer 6 or later
 - Vista, Windows XP - Mozilla Firefox
 - SP2, Windows 2000 - CD-ROM Drive
 - SP4 or Mac OS - Network Interface Card
 - X(v10.4/v10.3), Linux

PHYSICAL

Operating Temperature

- Working -40°C to 85°C

Humidity

- 95% Maximum (non-condensing)

Dimensions

- With case 100 mm x 60 mm x 21 mm

Weight

- 220 g (not including antennas)
- 330 g (including antennas)
- 650 g (including all accessories)

OTHER

Warranty

- 1 Year

Regulatory Compliance

- RCM, CE, RoHS
- Modem is approved by Telstra

Package Contents

- CM685 Router
- CAT5 Ethernet Cable
- Serial Cable
- Power Adapter
- 4 x Antennas (2 x Cell, 2 x WiFi)